# 43<sup>RD</sup> CONGRESS OF THE SECRS COPEN FILE HAGEN 12-16 SEPTEMBER 2025

Bella Center, Copenhagen - Denmark







#### **PAY ATTENTION TO THE FOLLOWING:**

Stands above 250 sqm must include an emergency aisle of 1.3m within that space

A ramp is required for raised floors above 2.5cm Electricity is 24H and includes early build-up

It will be disconnected the day after exhibition Stand wishing for less than 30% visibility can have their design reviewed by EA. (Maximum closure 50%)

Rigging weight per point is limited First come first serve! Handheld CO2 extinguisher required for any backroom/storage rooms with electrical items

Hatches are compulsory. This is to ensure access to all fuse boxes

Please take your waste with you!

B

#### **PAY ATTENTION TO THE FOLLOWING:**

Early deadlines due to venue availability

Rule regarding branding on hanging elements on Neighbors side no longer exists. The venue calculates rigging weight capacity based on all hanging elements in the hall, including neighboring stands. 40x80cm freestanding concrete pillars line the arcade sections running east/west at intervals of 9m.


Strict rules for closed ceiling. Further information in manual. Pillars let into the outer walls measure 35 x 40cm Submit your final rigging plan by **27 May**, we will prioritize your submission to the top of our list

# HALL C

Maximum building height:

- Hall **C1**: 3,5m NO RIGGING
- Hall C2: 5m top of rigging truss RIGGING DIFFICULT
- Hall C3: 7m top of rigging truss
- Hall C4: 7m top of rigging truss
- Pillars next to the main aisles
- Max floor load 4000kg per sqm
- Electricity supplied from floor gutters or ceiling




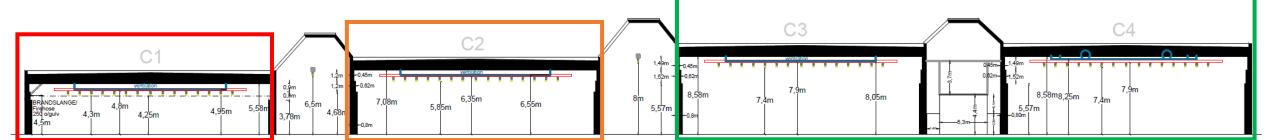

## HALL C

- Hall C has fixed hanging points placed every 3 meters, with a typical weight capacity of approximately 200 kg per point. However, if a hanging point is required outside of the fixed locations, **bridling** will be necessary, which significantly reduces the load capacity to around 90 kg.
- It's important to note that if multiple exhibitors, such as Exhibitor A and Exhibitor B, request the same hanging point, it affects the total weight allowance. To finalize approvals, we must wait until all rigging requests are submitted and evaluate the total weight for all hanging banners.
- Additionally, each rigging request is evaluated individually, considering the unique structural elements in the roof, such as ventilation.



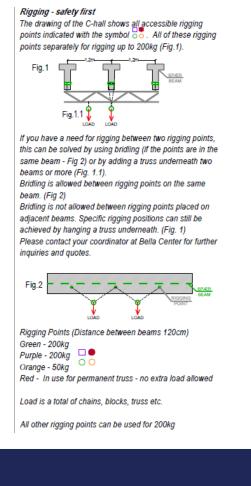

#### Pillars in Hall C

Please note that Hall C contains numerous pillars, some of which have attachments related to health and safety, fire regulations, or security. These attachments cannot be covered. Below, you'll find examples of these pillars along with a floorplan indicating their locations.













# HALL E

- Maximum building height 7m (top of rigging truss)
- Electricity supplied from floor gutters or ceiling
- Sloped glass roof with possible impact sun light(no shading or darkening added)
- Limited weight per rigging point
- Max floor load 4000kg per sqm



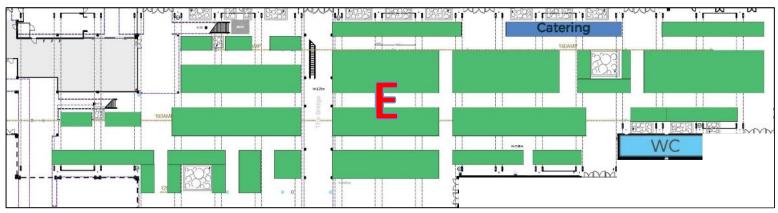


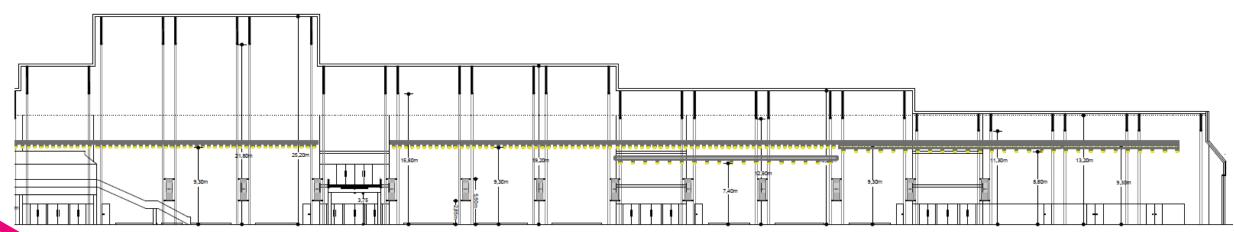



### HALL B

#### Important info:

- Shell Schemes only
- Maximum building height: 2.5m
- Includes pillars
- Floor gutters
- Max floor load 4000kg per sqm

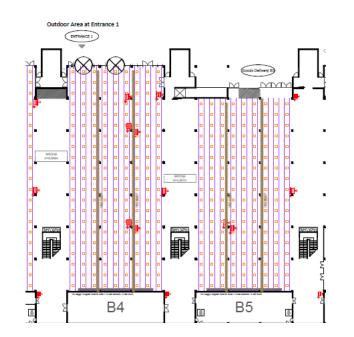

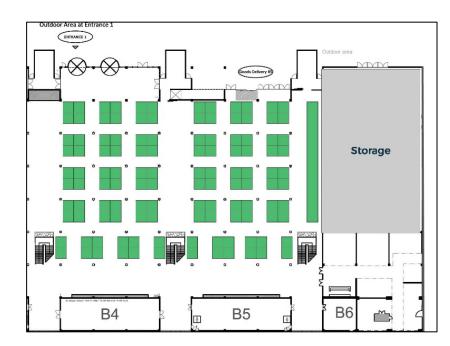

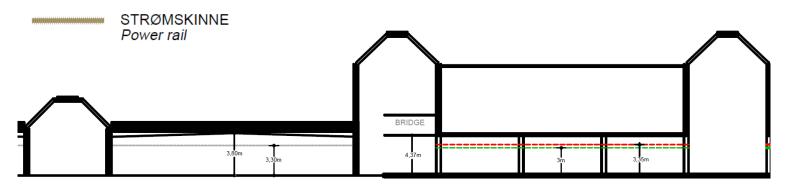

**B4**